



Product Selector Guide

Rogers Corporation was founded in 1832 and has over 60 years of experience as a global supplier of high performance RF materials.

Rogers Corporation is the world's leading manufacturer of high performance dielectrics, laminates and prepregs used in microwave and RF printed circuit and related applications in Aerospace & Defense, Wireless & Wireline (digital) Infrastructure, Automotive Radar Sensor, Satellite TV, Mobile Internet Device and High End Chip Scale Packaging.

Rogers is headquartered in Chandler, Arizona. Additional manufacturing, sales and technical service locations in North America, Europe and Asia enable Rogers to support our global customers at the local level.



Beyond recently expanded manufacturing capability, an extensive and growing product portfolio supports a wide array of application needs and environments. Rogers' application and technical service engineers are ready to assist in material selection, for design and PCB manufacturing phases of your product development process.



With unmatched industry expertise, Rogers Corporation continues to conceive and develop new material solutions for ever more challenging problems. For example, over the last several years Rogers Corporation introduced thermal management materials and continues to innovate to meet the needs for a range of emerging higher power applications. Our dedication to improving on electrical characterization capabilities, already best in class, enables us to anticipate questions and work collaboratively to push the material performance envelope.

www.rogerscorp.com



LAMINATES

Product	Dielectric Constant, ϵ_r @ 10 GHz (2.5 GHz) (Typical)		Dissipation ⁽¹⁾ Factor TAN δ @ 10 GHz (2.5 GHz) (Typical)	Thermal ⁽²⁾ Coefficient of ϵ_r -50°C to 150°C ppm/°C (Typical)	Volume Resistivity Mohm • cm (Typical)	Surface Resistivity Mohm (Typical)	Water ⁽⁴⁾ Absorption D48/50 % (Typical)
	Process ⁽¹⁾	Design ⁽¹¹⁾					
ML SERIES™							
92ML™ Woven Glass Reinforced Modified Epoxy Laminates	5.3 (1 MHz)	-	0.011 (1 MHz)	-	4.9 X 10 ⁹	9.9 X 10 ⁷	(22) 0.12
AD SERIES™							
AD250C™ Woven Glass Reinforced PTFE Antenna Grade Laminates	2.50 ± 0.04	2.52	0.0013	-117	4.8 X 10 ⁸	4.1 X 10 ⁷	(22) 0.04
AD255C™ Woven Glass Reinforced PTFE Antenna Grade Laminates	2.55 ± 0.04	2.60	0.0013	-110	7.4 X 10 ⁸	3.6 X 10 ⁷	(22) 0.03
AD300D™ Woven Glass Reinforced PTFE Antenna Grade Laminates	2.97 ± 0.05	2.94	0.0021	-73	1.7 X 10 ⁸	5.1 X 10 ⁷	0.04
AD350A™ Woven Glass Reinforced PTFE Antenna Grade Laminates	3.50 ± 0.05	3.54	0.0033	-57	1.5 X 10 ⁹	9.5 X 10 ⁷	(22) 0.10
AD1000™ Woven Glass Reinforced PTFE	10.20* ± 0.35	10.2	0.0023	-380	1.4 X 10 ⁹	1.8 X 10 ⁹	(22) 0.03
CLTE SERIES™							
CLTE-XT™ Woven Glass Reinforced PTFE	2.94* ± 0.03	2.94	0.0012	-9	4.3 X 10 ⁸	2.5 X 10 ⁸	(22) 0.02
CLTE™ Woven Glass Reinforced PTFE	2.98 ± 0.04	2.98	0.0023	-9	1.4 X 10 ⁹	1.3 X 10 ⁶	(22) 0.04
CLTE-AT™ Woven Glass Reinforced PTFE	3.00 ± 0.04	3.00	0.0013	-10	4.3 X 10 ⁸	2.0 X 10 ⁸	(22) 0.03
CLTE-MW™ Woven Glass Reinforced PTFE	2.94 - 3.02 ± 0.04	3.03 to 3.10	0.0015	-35	1.3 X 10 ⁷	2.5 X 10 ⁶	(22) 0.03
CUCLAD® SERIES							
CuClad® 217 Cross-Plied Woven Glass Reinforced PTFE	2.17, 2.20 ± 0.02	2.17, 2.20	0.0009	-151	2.3 X 10 ⁸	3.4 X 10 ⁶	(22) 0.02
CuClad 233 Cross-Plied Woven Glass Reinforced PTFE	2.33 ± 0.02	2.40	0.0013	-171	8.0 X 10 ⁸	2.4 X 10 ⁶	(22) 0.02
CuClad 250 Cross-Plied Woven Glass Reinforced PTFE	2.40 to 2.55* ± 0.04	2.40 to 2.60*	0.0017	-170	8.0 X 10 ⁹	1.5 X 10 ⁸	(22) 0.03
DICLAD® SERIES							
DiClad® 880 Woven Glass Reinforced PTFE	2.17, 2.20 ± 0.02	2.2	0.0009	-160	1.4 X 10 ⁹	2.9 X 10 ⁶	(22) 0.02
DiClad 870 Woven Glass Reinforced PTFE	2.33 ± 0.04	2.33	0.0013	-161	1.5 X 10 ⁹	3.4 X 10 ⁷	(22) 0.02
DiClad 527 Woven Glass Reinforced PTFE	2.40 to 2.60* ± 0.04	2.40 to 2.60*	0.0017	-153	1.2 X 10 ⁹	4.5 X 10 ⁷	(22) 0.03
ISOCCLAD® SERIES							
IsoClad® 917 Non-Woven Glass Reinforced PTFE	2.17 ± 0.02	2.17	0.0013	-157	1.5 X 10 ¹⁰	1.0 X 10 ⁹	(22) 0.04
IsoClad 933 Non-Woven Glass Reinforced PTFE	2.33 ± 0.04	2.33	0.0016	-132	3.5 X 10 ⁸	1.0 X 10 ⁸	(22) 0.05
KAPPA®							
Kappa® 438 Hydrocarbon / Ceramic / Woven Glass UL 94 V-0 Laminates	4.10 ± 0.08	4.38	0.005	-21	2.9 X 10 ⁹	6.2 X 10 ⁷	0.12
MAGTREX™							
MAGTREX™ 555 Magneto-Dielectric Laminates	$\epsilon_r = 6.5 \pm 0.5$ $\mu_r = 6.0 \pm 0.2$	-	See Data Sheet	~+1000	6.15 X 10 ⁸	1.74 X 10 ⁸	0.25
RO1000®							
XtremeSpeed™ RO1200™ PTFE Ceramic Woven Glass Reinforced	3.03 - 3.10 ± 0.10	3.03 - 3.10	0.0017	-35	1.3 X 10 ⁷	2.5 X 10 ⁶	0.03

*Refer to Data Sheets for Dielectric Constant and Thickness Options

Thermal Conductivity W/(m·K) (Typical) 50°C ASTM D5470	Coefficient of Thermal Expansion ⁽⁶⁾ -55° to 288°C ppm/°C (Typical)			Peel Strength 1 oz (35µm) ED Foil lbs/in. (N/mm) (Typical)	Density g/cm ³ (Typical)	Flammability Rating UL 94	Lead-Free ⁽⁹⁾ Process Compatible	PIM ⁽²³⁾ dBc (Typical)	Product	
	X	Y	Z							
1.60	18	18	27	7.6	2.26	V-0	YES	-	92ML™ Woven Glass Reinforced Modified Epoxy Laminates	ML SERIES™
0.33	47	29	196	14.8 (2.6)	2.28	V-0	YES	-164	AD250C™ Woven Glass Reinforced PTFE Antenna Grade Laminates	AD SERIES™
0.35	34	26	196	13.6 (2.4)	2.28	V-0	YES	-164	AD255C™ Woven Glass Reinforced PTFE Antenna Grade Laminates	
0.37	24	23	98	18.3 (3.2)	2.23	V-0	YES	-159	AD300D™ Woven Glass Reinforced PTFE Antenna Grade Laminates	
0.44	18	18	63	14.7 (2.6)	2.43	V-0	YES	-164	AD350A™ Woven Glass Reinforced PTFE Antenna Grade Laminates	
0.81	8	10	20	12.0 (2.14)	3.20	V-0	YES	-	AD1000™ Woven Glass Reinforced PTFE	
0.56	8	8	20	7.2 (1.29)	2.02	V-0	YES	-	CLTE-XT™ Woven Glass Reinforced PTFE	CLTE SERIES™
0.50	10	12	34	7.0 (1.25)	2.38	V-0	YES	-	CLTE™ Woven Glass Reinforced PTFE	
0.64	8	8	20	6.5 (1.16)	2.06	V-0	YES	-	CLTE-AT™ Woven Glass Reinforced PTFE	
0.42	8	8	30	6.0 (1.1)	2.1	V-0	YES	-	CLTE-MW™ Woven Glass Reinforced PTFE	
0.26	29	28	246	14.0 (2.50)	2.23	V-0	YES	-	CuClad® 217 Cross-Plied Woven Glass Reinforced PTFE	CUCLAD® SERIES
0.26	23	24	194	14.0 (2.50)	2.26	V-0	YES	-	CuClad 233 Cross-Plied Woven Glass Reinforced PTFE	
0.25	18	19	177	14.0 (2.50)	2.31	V-0	YES	-	CuClad 250 Cross-Plied Woven Glass Reinforced PTFE	
0.26	25	34	252	14.0 (2.50)	2.23	V-0	YES	-	DiClad® 880 Woven Glass Reinforced PTFE	DICALAD® SERIES
0.26	17	29	217	14.0 (2.50)	2.26	V-0	YES	-	DiClad 870 Woven Glass Reinforced PTFE	
0.25	14	21	173	14.0 (2.50)	2.31	V-0	YES	-	DiClad 527 Woven Glass Reinforced PTFE	
0.26	46	47	236	10.0 (1.79)	2.23	V-0	YES	-	IsoClad® 917 Non-Woven Glass Reinforced PTFE	ISOCCLAD® SERIES
0.26	31	35	203	10.0 (1.79)	2.27	V-0	YES	-	IsoClad 933 Non-Woven Glass Reinforced PTFE	
0.64	13	16	42	5.8	1.99	V-0	YES	-	Kappa® 438 Hydrocarbon / Ceramic / Woven Glass UL 94 V-0 Laminates	KAPPA®
0.47	22	25	25	3.1	3.45	N/A	YES	-	MAGTREX™ 555 Magneto-Dielectric Laminates	MAGTREX™
0.42	8	8	30	>4.5 (>0.79)	2.1	V-0	YES	-	XtremeSpeed™ R01200™ PTFE Ceramic Woven Glass Reinforced	R01000®

LAMINATES

Product		Dielectric Constant, ε _r @ 10 GHz (2.5 GHz) (Typical)		Dissipation ⁽¹⁾ Factor TAN δ @ 10 GHz (2.5 GHz) (Typical)	Thermal ⁽²⁾ Coefficient of ε _r -50°C to 150°C ppm/°C (Typical)	Volume Resistivity Mohm • cm (Typical)	Surface Resistivity Mohm (Typical)	Water ⁽⁴⁾ Absorption D48/50 % (Typical)
		Process ⁽¹⁾	Design ⁽¹¹⁾					
RO3000® SERIES	R03003G2™ PTFE Ceramic	3.00 ± 0.04	⁽²⁹⁾ 3.07	0.0011	-35	1.4 X 10 ⁹	2.6 X 10 ⁸	0.06
	R03003™ PTFE Ceramic	⁽⁷⁾ 3.00 ± 0.04	3.00	0.0010	-3	1 X 10 ⁷	1 X 10 ⁷	0.04
	R03035™ PTFE Ceramic	3.50±0.05	3.60	0.0015	-45	1 X 10 ⁷	1 X 10 ⁷	0.04
	R03006™ PTFE Ceramic	6.15 ± 0.15	6.4	0.002	-262	1 X 10 ⁵	1 X 10 ⁵	0.02
	R03010™ PTFE Ceramic	10.20 ± 0.30	11.2	0.0022	-395	1 X 10 ⁵	1 X 10 ⁵	0.05
	R03210™ PTFE Ceramic Woven Glass Reinforced	10.20 ± 0.50	10.8	0.0027	-459	1 X 10 ³	1 X 10 ³	0.12
RO4000® SERIES	R04003C™ Hydrocarbon / Ceramic / Woven Glass	3.38 ± 0.05	3.55	0.0027	+40	1.7 X 10 ¹⁰	4.2 X 10 ⁹	0.04
	R04350B™ Hydrocarbon / Ceramic / Woven Glass	3.48 ± 0.05	3.66	0.0037	+50	1.2 X 10 ¹⁰	5.7 X 10 ⁹	0.05
	R04360G2™ Hydrocarbon / Ceramic / Woven Glass	6.15 ± 0.15	6.4	0.0038	-131	4 X 10 ⁷	9 X 10 ⁶	0.08
	R04830™ Hydrocarbon/ Ceramic/ Spread Woven Glass	3.25 ± 0.05	3.24	0.0033	-30	9.6 X 10 ⁹	1.1 X 10 ⁸	0.15
	⁽¹⁶⁾ R04835T™ Hydrocarbon/ Ceramic/ Spread Woven Glass	3.33 ± 0.05	3.52	0.0030	+35 ppm/°C (from -50 to +50°C) -35 ppm/°C (from +50 to +150°C)	1.34 X 10 ⁸	1.17 X 10 ⁶	0.20
	R04835™ Hydrocarbon / Ceramic / Woven Glass	3.48 ± 0.05	3.66	0.0037	+50	5 X 10 ⁸	7 X 10 ⁸	0.05
	R04533™ Hydrocarbon / Ceramic / Woven Glass Antenna Grade Laminates	3.30 ± 0.08	3.45	0.0025 (0.0020)	+40	1.1 X 10 ¹⁰	9.9 X 10 ⁸	0.02
	R04534™ Hydrocarbon / Ceramic / Woven Glass Antenna Grade Laminates	3.40 ± 0.08	3.55	0.0027 (0.0022)	+40	1.7 X 10 ¹⁰	4.2 X 10 ⁹	0.06
	R04535™ Hydrocarbon / Ceramic / Woven Glass UL 94 V-0 Antenna Grade Laminates	3.44 ± 0.08	3.60	0.0037 (0.0032)	+50	1.2 X 10 ¹⁰	5.7 X 10 ⁹	0.09
	R04725JXR™ Hydrocarbon / Ceramic / Woven Glass	2.55 ± 0.05	2.64	0.0026 (0.0022)	+34	2.16 X 10 ⁸	4.8 X 10 ⁷	0.24
	R04730G3™ Hydrocarbon / Ceramic / Woven Glass UL 94 V-0 Antenna Grade Laminates	3.00 ± 0.05	2.98	0.0028	+34	9.0 X 10 ⁷	7.2 X 10 ⁵	0.93
RT/DUROID 5000	RT/duroid® 5880LZ Filled PTFE Composite	2.00 ± 0.04	2.00	0.0021	+20	1.74 X 10 ⁷	2.08 X 10 ⁶	0.31
	RT/duroid 5880 PTFE Random Glass Fiber	2.20 ± 0.02	2.20	0.0009	-125	2 X 10 ⁷	3 X 10 ⁷	0.02
	RT/duroid 5870 PTFE Random Glass Fiber	2.33 ± 0.02	2.33	0.0012	-115	2 X 10 ⁷	2 X 10 ⁷	0.02

Thermal Conductivity W/(m·K) (Typical) 50°C ASTM D5470	Coefficient of Thermal Expansion ⁽⁶⁾ -55° to 288°C ppm/°C (Typical)			Peel Strength 1 oz (35µm) ED Foil lbs/in. (N/mm) (Typical)	Density g/cm ³ (Typical)	Flammability Rating UL 94	Lead-Free ⁽⁹⁾ Process Compatible	PIM ⁽²³⁾ dBc (Typical)	Product
	X	Y	Z						
0.43	16	17	18	⁽³⁰⁾ 12.0	2.15	V-0	YES	-	R03003G2™ PTFE Ceramic
0.50	17	16	25	12.7 (2.2)	2.1	V-0	YES	-	R03003™ PTFE Ceramic
0.50	17	17	24	10.2 (1.8)	2.1	V-0	YES	-	R03035™ PTFE Ceramic
0.79	17	17	24	7.1 (1.2)	2.6	V-0	YES	-	R03006™ PTFE Ceramic
0.95	13	11	16	9.4 (1.6)	2.8	V-0	YES	-	R03010™ PTFE Ceramic
0.81	13	13	34	11.0 (1.9)	3	V-0	YES	-	R03210™ PTFE Ceramic Woven Glass Reinforced
0.71	11	14	46	6.0 (1.05)	1.8	NON FR	YES	-	R04003C™ Hydrocarbon / Ceramic / Woven Glass
0.69	10	12	32	5.0 (0.88)	1.9	V-0	YES	-	R04350B™ Hydrocarbon / Ceramic / Woven Glass
0.75	13	14	28	5.2 (0.91)	2.16	V-0	YES	-	R04360G2™ Hydrocarbon / Ceramic / Woven Glass
0.45	23	23	110	3.8 (0.67)	1.68	V-0	YES	-	R04830™ Hydrocarbon / Ceramic / Spread Woven Glass
0.53 0.52 @ 80°	14	16	62	3.0 (0.53)	1.81	V-0	YES	-	⁽¹⁶⁾ R04835T™ Hydrocarbon / Ceramic / Spread Woven Glass
0.66	10	12	31	5.0 (0.88)	1.92	V-0	YES	-	R04835™ Hydrocarbon / Ceramic / Woven Glass
0.60	13	11	37	6.9 (1.2)	1.8	NON FR	YES	-157	R04533™ Hydrocarbon / Ceramic / Woven Glass Antenna Grade Laminates
0.60	11	14	46	6.3 (1.1)	1.8	NON FR	YES	-157	R04534™ Hydrocarbon / Ceramic / Woven Glass Antenna Grade Laminates
0.6	16	17	50	5.1 (0.9)	1.9	V-0	YES	-157	R04535™ Hydrocarbon / Ceramic / Woven Glass UL 94 V-0 Antenna Grade Laminates
⁽¹⁹⁾ 0.38	13.9	19.0	25.6	8.5 (1.49)	1.27	NON FR	YES	-160	R04725JXR™ Hydrocarbon / Ceramic / Woven Glass
0.45	15.9	14.4	35.2	4.1	1.58	V-0	YES	≤-165	R04730G3™ Hydrocarbon / Ceramic / Woven Glass UL 94 V-0 Antenna Grade Laminates
0.33	54	47	40	>4.0	1.4	V-0	YES	-	RT/duroid® 5880LZ Filled PTFE Composite
0.20	31	48	237	31.2 (5.5)	2.2	V-0	YES	-	RT/duroid 5880 PTFE Random Glass Fiber
0.22	22	28	173	27.2 (4.8)	2.2	V-0	YES	-	RT/duroid 5870 PTFE Random Glass Fiber

R03000® SERIES

R04000® SERIES

RT/DUROID 5000

LAMINATES

Product		Dielectric Constant, ε _r @ 10 GHz (2.5 GHz) (Typical)		Dissipation ⁽¹⁾ Factor TAN δ @ 10 GHz (2.5 GHz) (Typical)	Thermal ⁽²⁾ Coefficient of ε _r -50°C to 150°C ppm/°C (Typical)	Volume Resistivity Mohm · cm (Typical)	Surface Resistivity Mohm (Typical)	Water ⁽⁴⁾ Absorption D48/50 % (Typical)
		Process ⁽¹⁾	Design ⁽¹¹⁾					
RT/DUROID 6000	RT/duroid 6002 PTFE Ceramic	2.94 ± 0.04	2.94	0.0012	+12	1 X 10 ⁶	1 X 10 ⁷	0.02
	RT/duroid 6202PR ⁽²⁰⁾ PTFE Ceramic Woven Glass Reinforced	2.90 to 3.00 ± 0.04	2.90 to 3.00	0.0020	⁽⁸⁾ +5 to -15	1 X 10 ¹⁰	1 X 10 ⁹	0.03
	RT/duroid 6202 PTFE Ceramic Woven Glass Reinforced	⁽⁸⁾ 2.90 to 3.06	⁽⁸⁾ 2.90 to 3.06 ± 0.04	0.0015	⁽⁸⁾ +5 to -15	1 X 10 ⁶	1 X 10 ⁹	0.04
	RT/duroid 6035HTC PTFE Ceramic	3.50 ± 0.05	3.60	0.0013	-66	1 X 10 ⁸	1 X 10 ⁸	⁽¹²⁾ 0.06
	RT/duroid 6006 PTFE Ceramic	6.15 ± 0.15	6.45	0.0027	-410	2 X 10 ⁷	7 X 10 ⁷	0.05
	RT/duroid 6010.2LM PTFE Ceramic	10.20 ± 0.25	10.7	0.0023	-425	5 X 10 ⁵	5 X 10 ⁶	0.01
TC SERIES	TC350™ PTFE Ceramic Woven Glass Reinforced	3.50 ± 0.05	3.50	0.0020	-9	7.4 X 10 ⁶	3.2 X 10 ⁷	⁽²²⁾ 0.05
	TC350 Plus PTFE Ceramic Woven Glass Reinforced	3.50 ± 0.05	3.62	0.0017	-42	9.4 X 10 ¹¹	3.3 X 10 ¹²	⁽²⁵⁾ 0.05
	TC600™ PTFE Ceramic Woven Glass Reinforced	6.15 ± 0.15	6.15	0.0020	-75	1.6 X 10 ⁹	3.1 X 10 ⁹	⁽²²⁾ 0.03
TMM SERIES	TMM® 3 Hydrocarbon Ceramic	3.27 ± 0.032	3.45	0.0020	+37	3 X 10 ⁹	9 x 10 ⁹	⁽¹⁰⁾ 0.06
	TMM 4 Hydrocarbon Ceramic	4.50 ± 0.045	4.7	0.0020	+15	6 X 10 ^{8*}	1 x 10 ⁹	⁽¹⁰⁾ 0.07
	TMM 6 Hydrocarbon Ceramic	6.00 ± 0.08	6.3	0.0023	-11	1 X 10 ^{8*}	1 x 10 ⁹	⁽¹⁰⁾ 0.06
	TMM 10 Hydrocarbon Ceramic	9.20 ± 0.23	9.8	0.0022	-38	2 X 10 ⁸	4 X 10 ⁷	⁽¹⁰⁾ 0.09
	TMM 10i Hydrocarbon Ceramic	9.80 ± 0.245	9.9	0.0020	-43	2 X 10 ⁸	4 X 10 ⁷	⁽¹⁰⁾ 0.16
	TMM 13i Hydrocarbon Ceramic	⁽¹⁴⁾ 12.85 ± 0.35	12.2	0.0019	-70	-	-	0.13

Thermal Conductivity W/(m·K) (Typical) 50°C ASTM D5470	Coefficient of Thermal Expansion ⁽⁶⁾ -55° to 288°C ppm/°C (Typical)			Peel Strength 1 oz (35µm) ED Foil lbs/in. (N/mm) (Typical)	Density g/cm ³ (Typical)	Flammability Rating UL 94	Lead-Free ⁽⁹⁾ Process Compatible	PIM ⁽²³⁾ dBc (Typical)	Product	
	X	Y	Z							
0.60	16	16	24	8.9 (1.6)	2.1	V-0	YES	-	RT/duroid 6002 PTFE Ceramic	RT/DUROID 6000
0.68	15	15	30	14.3 (2.5)	2.1	V-0	YES	-	RT/duroid 6202PR ⁽²⁰⁾ PTFE Ceramic Woven Glass Reinforced	
0.68	15	15	30	9.1 (1.6)	2.1	V-0	YES	-	RT/duroid 6202 PTFE Ceramic Woven Glass Reinforced	
1.44	19	19	39	7.9 (1.4)	2.2	V-0	YES	-	RT/duroid 6035HTC PTFE Ceramic	
0.49	47	34	117	14.3 (2.5)	2.7	V-0	YES	-	RT/duroid 6006 PTFE Ceramic	
0.86	24	24	47	12.3 (2.1)	3.1	V-0	YES	-	RT/duroid 6010.2LM PTFE Ceramic	
0.72 ⁽²⁷⁾ 1.0	7	7	23	7.0 (1.2)	2.3	V-0	YES	-	TC350™ PTFE Ceramic Woven Glass Reinforced	TC SERIES
1.24	10	9	38	3.8 (0.7)	TBD	V-0	YES	TBD	TC350 Plus PTFE Ceramic Woven Glass Reinforced	
1.10	9	9	35	8.0 (1.4)	3.0	V-0	YES	-	TC600™ PTFE Ceramic Woven Glass Reinforced	
0.70	15	15	23	5.7 (1.0)	1.8	NON FR	YES	-	TMM® 3 Hydrocarbon Ceramic	TMM SERIES
0.70	16	16	21	5.7 (1.0)	2.1	NON FR	YES	-	TMM 4 Hydrocarbon Ceramic	
0.72	18	18	26	5.7 (1.0)	2.4	NON FR	YES	-	TMM 6 Hydrocarbon Ceramic	
0.76	21	21	20	5 (0.9)	2.8	NON FR	YES	-	TMM 10 Hydrocarbon Ceramic	
0.76	19	19	20	5 (0.9)	2.8	NON FR	YES	-	TMM 10i Hydrocarbon Ceramic	
⁽¹⁷⁾ 0.76	19	19	20	4 (0.7)	3.0	NON FR	YES	-	TMM 13i Hydrocarbon Ceramic	

BONDING MATERIALS

Product	Dielectric ⁽¹⁾ Constant, ϵ_r (Typical)	Dissipation ⁽¹⁾ Factor TAN δ @ 10 GHz (Typical)	Volume Resistivity Mohm • cm (Typical)	Water ⁽⁴⁾ Absorption D48/50 % (Typical)	Thermal ⁽⁵⁾ Conductivity W/(m•K) (Typical) 50°C ASTM D5470
92ML™ Prepreg	5.3 (1 MHz)	0.011 (1 MHz)	4.9 X 10 ⁹	0.12 ⁽²⁵⁾	1.60 ⁽²⁶⁾
2929 Bondply	2.94 ± 0.05	0.0030	⁽²¹⁾ 7.4 X 10 ⁹	0.1	0.40
COOLSPAN® TECA Thermoset Thermally & Electrically Conductive Adhesive (TECA) Film	N/A	N/A	3.8 X 10 ⁻¹⁰ (Conductive)	N/A	6.00
6250 Bonding Film	2.32	0.0013	1.0 X 10 ¹⁰	0.01 ⁽²²⁾	0.17
6700 Bonding Film	2.35	0.0025	1.0 X 10 ¹²	0.01 ⁽²²⁾	0.17
R04450F™ Hydrocarbon / Ceramic / Woven Glass / Prepreg	3.52 ± 0.05	0.0040	8.93 X 10 ⁸	0.09	0.65
⁽²⁸⁾ R04450T™ Hydrocarbon / Ceramic / Woven Glass / Prepreg	3.23 ± 0.05	0.0039	2.9 X 10 ⁹	0.11	0.50
R04460G2™ Hydrocarbon / Ceramic / Woven Glass / Prepreg	6.15 ± 0.15	0.0040	9.1 X 10 ⁸	0.13	0.67
XtremeSpeed™ R01200™ Bondply	2.97	0.0012	8.9 X 10 ⁷	0.13 ⁽²⁵⁾	0.5
SpeedWave™ 300P Prepreg	3.16	0.0021	1.0 X 10 ⁹	0.12 ⁽²⁵⁾	0.48

Properties Notes:

- (1) Measured by IPC-TM-650 method 2.5.5.5 @ ~10 GHz, 23°C. Materials were based on testing raw substrate material. ϵ_r values and tolerance reported by IPC-TM-650 method 2.5.5.5 are the basis for quality acceptance, but for some products these values may be incorrect for design engineering applications, especially those in microstrip. We recommend that prototype boards of a new design be verified for electrical performance.
- (2) Measured by IPC-TM-650 method 2.5.5.5 at ~10GHz modified.
- (3) Typical values are mean values derived from populations of measurements involving multiple lots of the specific foil type.
- (4) Measured after 48±1 hours immersion at 50±1°C in accordance with the ASTM D570 standard.
- (5) Tested by ASTM C518.
- (6) Tested by IPC-TM-650 2.4.41. Values are average over temperature range but not necessarily linear. However for RT/duroid 6002 and TMM grades the response is essentially linear.
- (7) The nominal dielectric constant of an 0.060" thick R03003 laminate as measured by IPC-TM-2.5.5.5 will be 3.04 due to the elimination of biasing caused by air gaps in the test fixture. For further information refer to Rogers' T.R. 5242.
- (8) Due to construction limitations, the dielectric constant of 0.005" laminates is 3.06 ± 0.04; 0.010" and 0.015" laminates are 3.02 ± 0.04; TCDK is +5 for the higher Dk range; and for 2.90 TCDK is -15
- (9) Rogers' high frequency laminates and prepregs are lead-free process compatible and in accordance with IEC 61249-2-21.
- (10) TMM* material test conditions D24/50 (twenty-four hours at 50°C) on 0.050" (1.27mm) thick specimens. TMM13i test condition D48/50.
- (11) Design Dk is determined by testing thick microstrip transmission line circuits and reporting the thickness-axis dielectric constant of the raw material without the influence of copper. For more information, refer to the article on the Rogers website titled "The Influence of Test Method, Conductor Profile, and Substrate Anisotropy on the Permittivity Values Required for Accurate Modeling of High Frequency Planar Circuits", which was featured in a publication Sept. 2012. <http://www.rogerscorp.com/acs/articles.aspx>
- (12) Testing conditions: 24 hours @ 23 C, specimens etched free of copper
- (13) Available only with LoPro® copper foil
- (14) Measured by IPC-TM-650 method 2.5.5.6 .
- (15) 2oz available on TC350™ Plus only
- (16) Values for 2.5 mil thickness.
- (17) Estimated

Coefficient of Thermal Expansion ⁽⁶⁾ 0° - 100°C ppm/°C (Typical)			Density g/cm ³ (Typical)	Flammability Rating UL 94	Lead-Free ⁽⁹⁾ Process Compatible	Press Temperatures		Product
X	Y	Z				F	C	
18	18	27	2.26	V-0	YES	365	185	92ML™ Prepreg
50	50	50	1.50	NON-FR	YES	450	232	2929 Bondply
45	45	45	4.60	NON-FR	YES	350	175	COOLSPAN® Thermoset & Electrically Conductive Adhesive (TECA) Film
-	-	-	0.93	-	NO	275	135	6250 Bonding Film
-	-	-	2.10	-	NO	450	232	6700 Bonding Film
19	17	50	1.83	V-0	YES	350	175	R04450F™ Hydrocarbon / Ceramic / Woven Glass / Prepreg
20	21	57	1.83	V-0	YES	350	175	⁽²⁸⁾ R04450T™ Hydrocarbon / Ceramic / Woven Glass / Prepreg
15	18	43	2.22	V-0	YES	350	175	R04460G2™ Hydrocarbon / Ceramic / Woven Glass / Prepreg
29	29	29	-	V-0	YES	700	370	XtremeSpeed™ R01200™ Bondply
15	15	35	-	V-0	YES	392	200	SpeedWave™ 300P Prepreg

Properties Notes Continued:

(18) IPC-TM-650.2.5.5.5.1

(19) Test method: ASTM D5470-12 @ 50°C

(20) PR stands for Planar Resistor. Resistive foil, if required, must be specified when ordering 6202PR laminate.

(21) Conditions 125°C/24 hours. Test method IPC-TM-650 2.5.17.1

(22) Measured after 24+½-0 hours immersion at 23 ± 1°C in accordance with the ASTM D570 standard.

(23) 12 microstrip transmission line test circuit on 0.060" thick laminate.

(24) N/A

(25) (D24/23) IPC TM-650 2.6.2.1

(26) ASTM E1461

(27) 1.0 W/(m•K) based on ASTM E1461

(28) Values for 3 mil thickness.

(29) Measured using differential phase length method at 77GHz.

(30) Value shown is for 1/2 oz ED copper.

Typical values are a representation of an average value for the population of the property.
For specification values contact Rogers Corporation.

The information contained in this Product Selector Guide is intended to assist you in designing with Rogers' circuit materials. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose. The user should determine the suitability of Rogers' circuit materials for each application.

Prolonged exposure in an oxidative environment may cause changes to the dielectric properties of hydrocarbon based materials. The rate of change increases at higher temperatures and is highly dependent on the circuit design. Although Rogers' high frequency materials have been used successfully in innumerable applications and reports of oxidation resulting in performance problems are extremely rare, Rogers recommends the customer evaluate each material and design combination to determine fitness for use over the entire life of the end product.

Metal Claddings

Foil Type	Weight or Thickness	Surface Roughness Sq(μm) or RMS(μm)		Products
		Dielectric Side	Top Side	
Rolled	1 oz (35 μm)	0.4	0.3	XtremeSpeed™ R01200™, R03003™, RT/duroid® 5870, 5880, 6002, 6202, DiClad® 527, DiClad® 870, DiClad® 880
	½ oz. (18 μm)	0.4	0.3	
Electrodeposited	1 oz (35 μm)	1.5	0.4	TC350™, TC600™, AD250™, AD255™, AD300™, AD350™
	½ oz. (18 μm)	1.6	0.4	
	2 oz (70 μm)	3.0	0.4	
	1 oz (35 μm)	1.7	0.4	CuClad 217, CuClad 233, CuClad 250, DiClad 527, DiClad 870, DiClad 880, IsoClad 917, IsoClad 933, CLTE, CLTE-AT, CLTE-XT, CLTE-MW, AD1000™
	½ oz. (18 μm)	1.5	0.4	
	1 oz (35 μm)	2.4	0.4	R03003, R03006, R03010, R03035, R03210 RT/duroid 5870, 5880, 5880LZ, 6002, 6035HTC, 6202, 6006, 6010.2LM, TMM® 3, 4, 6, 10, 10i, 13i
	½ oz. (18 μm)	2.0	0.4	
	2 oz. (70 μm)	3.5	0.4	Kappa® 438, R04003C™, R04350B™, R04360G2™ R04533™, R04534™, R04535™, R04730G3™, R04835™, 92ML Series (only product grade with 2oz), CU4000
	1 oz. (35 μm)	3.2	0.4	
	½ oz. (18 μm)	2.8	0.4	
	1 oz. (35 μm)	0.5	0.4	AD300D™-IM™, AD255C™-IM, DiClad® 880-IM
	1 oz. (35 μm)	-	0.4	R04835T™ R03003G2™
	½ oz. (18 μm)	0.7	0.4	
Electrodeposited Low Profile Reverse Treated	2 oz. (70 μm)	1.0	2.0	DiClad 527, DiClad 870, DiClad 880, CLTE, CLTE-AT, CLTE-XT, CLTE-MW (only product grade with 2oz), AD1000
	1 oz. (35 μm)	1.0	1.3	
	½ oz. (18 μm)	1.0	0.8	
	1 oz. (35 μm)	1.0	1.5	RT/duroid 6035HTC, AD250, AD255, AD300, AD350, TC350, TC600, TC350 Plus
	½ oz. (18 μm)	1.0	1.0	
LoPro® Foil	1 oz. (35 μm)	0.9	1.3	R04003C, R04350B, R04533, R04534, R04535, R04725JXR™, R04730G3™, R04830™, R04835, CU4000 LoPro
	½ oz. (18 μm)	0.9	0.8	
Resistive Foil	NiCr Ticer TCR ½ oz. (18 μm)	1.4	0.4	R04003C, R04350B, R04360G2, R04835
	OhmegaPly® ½ oz. (18 μm)	1.7	0.4	R04003C
	OhmegaPly ½ oz. (18 μm)	1.2	0.4	CLTE, DiClad 527, DiClad 870, DiClad 880, R03003, R03006, R03010, R03035, R03210, RT/duroid 5870, 5880, 6002, 6006, 6010.2LM, 6202, 6202PR

Property	Electrodeposited (ED)				Rolled (RLD)		
	¼ oz (9 μm)	0.5 oz (18 μm)	1 oz. (35 μm)	2 oz (70 μm)	0.5 oz (18 μm)	1 oz. (35 μm)	2 oz.(70 μm)
Tensile Strength, kpsi	15	33	40	40	20	22	28
Elongation, %	2	2	3	3	8	13	27
Vol Resistivity Microhm-cm	-	1.66	1.62	1.62	1.78	1.74	1.74
Thickness: in (μm)	0.0004 (10.2)	0.0007 (17.8)	0.0014 (35.6)	0.0028 (71.1)	0.0007 (17.8)	0.0014 (35.6)	0.0028 (71.1)

Rogers produces upon request a select number of copper clad laminates using commercially available, subtractively processed resistive foils. Resistive foil technology enables the use of planar resistors within the circuit boards that are made from our laminate products. The availability of these resistive foils varies depending on each particular copper clad laminate product offered by Rogers. However, in general Rogers uses both OhmegaPly® foil from Ohmega Technologies, Inc. (<http://ohmega.com/>) and TCR® foil from Ticer Technologies (<http://www.ticertechnologies.com/>). Rogers customers are encouraged to research the specific resistive foil products that are available as well as the performance and processing details from each foil supplier prior to placing orders with Rogers. As a service, Rogers offers customers the option of purchasing resistive foils bonded to certain substrates. Rogers does not guarantee the performance of resistive layers, and as such, shall not be liable for any loss or damage suffered by the Buyer. Rogers products manufactured with resistive foils are offered on a "best efforts" basis for appearance and resistive expectations. Please reference *Rogers Statement on Resistive Foil Visual Appearance and Resistive Expectations* at the Rogers Document Library website: <https://rogerscorp.com/downloads>

Thickness, Tolerance & Panel Size inches (mm)

Laminates

Product	Available Dielectric Thickness (Without The Cladding)	Available Claddings	Available Panel Sizes
92ML™	0.003" (0.076mm) ± 0.0007" 0.004" (0.102mm) ± 0.0007" 0.006" (0.152mm) ± 0.0010" 0.008" (0.203mm) ± 0.0015"	1 oz (35µm), 2 oz (70µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
AD250C™	0.020" (0.508mm) ± 0.0020" 0.030" (0.762mm) ± 0.0020" 0.060" (1.524mm) ± 0.0030"	½ oz (18µm), 1 oz (35µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
AD255C™	0.020" (0.510mm) ± 0.0020" 0.030" (0.762mm) ± 0.0020" 0.040" (1.016mm) ± 0.0020" 0.060" (1.524mm) ± 0.0030" 0.125" (3.175mm) ± 0.0060"	½ oz (18µm), 1 oz (35µm) ED ½ oz (18µm), 1 oz (35µm) RT 1 oz (35µm) IM	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
AD300D™	0.030" (0.762mm) ± 0.0020" 0.040" (1.020mm) ± 0.0020" 0.060" (1.524mm) ± 0.0020" 0.120" (3.050mm) ± 0.0060"	½ oz (18µm), 1 oz (35µm) ED ½ oz (18µm), 1 oz (35µm) RT 1 oz (35µm) IM	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
AD350A™	0.030" (0.762mm) ± 0.0020" 0.060" (1.524mm) ± 0.0030" 0.120" (3.048mm) ± 0.0060"	½ oz (18µm), 1 oz (35µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
AD1000™	0.025" (0.635mm) ± 0.0020" 0.050" (1.270mm) ± 0.0020"	½ oz (18µm), 1 oz (35µm) ED	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
CLTE-XT™	0.0051" (0.130mm) ± 0.0005" 0.0094" (0.239mm) ± 0.0007" 0.020" (0.508mm) ± 0.0010" 0.030" (0.762mm) ± 0.0010"	½ oz (18µm), 1 oz (35µm) ED ½ oz (18µm), 1 oz (35µm) RT	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
CLTE™	0.0053" (0.135mm) ± 0.0005" 0.010" (0.254mm) ± 0.0010" 0.020" (0.508mm) ± 0.0020" 0.030" (0.762mm) ± 0.0020"	½ oz (18µm), 1 oz (35µm) ED ½ oz (18µm), 1 oz (35µm) RT	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
CLTE-AT™	0.005" (0.127mm) ± 0.0005" 0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.0020" 0.060" (1.524mm) ± 0.0030"	½ oz (18µm), 1 oz (35µm) ED ½ oz (18µm), 1 oz (35µm) RT	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
CLTE-MW™	0.003" (0.076mm) ± 0.0005" 0.004" (0.102mm) ± 0.0005" 0.005" (0.127mm) ± 0.0007" 0.006" (0.152mm) ± 0.0007" 0.007" (0.178mm) ± 0.001" 0.008" (0.203mm) ± 0.001" 0.010" (0.254mm) ± 0.001"	½ oz (18µm), 1 oz (35µm), 2oz (70µm) RT	12"x 18" (305mm x 457mm) 24"x 18" (610mm x 457mm)
CuClad® 217	0.010" (0.254mm) ± 0.0010" 0.020" (0.508mm) ± 0.0020" 0.031" (0.787mm) ± 0.0020" 0.062" (1.524mm) ± 0.0020"	½ oz (18µm), 1 oz (35µm) ED	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
CuClad 233	0.010" (0.254mm) ± 0.0010" 0.020" (0.508mm) ± 0.0020" 0.031" (0.787mm) ± 0.0020" 0.062" (1.575mm) ± 0.0020"	½ oz (18µm), 1 oz (35µm) ED	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
CuClad 250	0.010" (0.254mm) ± 0.0009" 0.020" (0.508mm) ± 0.0020" 0.031" (0.787mm) ± 0.0020" 0.062" (1.575mm) ± 0.0020"	½ oz (18µm), 1 oz (35µm) ED	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)

Thickness, Tolerance & Panel Size inches (mm)

Laminates

Product	Available Dielectric Thickness (Without The Cladding)	Available Claddings	Available Panel Sizes
DiClad® 880	0.020" (0.508mm) ± 0.0020" 0.030" (0.762mm) ± 0.0020" 0.060" (1.524mm) ± 0.0020"	½ oz (18µm), 1 oz (35µm) ED ½ oz (18µm), 1 oz (35µm) RT 1 oz (35µm) IM	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
DiClad 870	0.031" (0.787mm) ± 0.0020" 0.093" (2.362mm) ± 0.0030" 0.125" (3.251mm) ± 0.0060"	½ oz (18µm), 1 oz (35µm) ED ½ oz (18µm), 1 oz (35µm) rolled	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
DiClad 527	0.020" (0.508mm) ± 0.0020" 0.030" (0.787mm) ± 0.0020" 0.060" (1.524mm) ± 0.0020"	½ oz (18µm), 1 oz (35µm) ED	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
IsoClad® 917	0.031" (0.787mm) ± 0.0020" 0.062" (1.524mm) ± 0.0040"	½ oz (18µm), 1 oz (35µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
IsoClad 933	0.015" (0.381mm) ± 0.0020" 0.031" (0.787mm) ± 0.0020" 0.062" (1.524mm) ± 0.0040"	½ oz (18µm), 1 oz (35µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
Kappa® 438	0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.0020" 0.040" (1.016mm) ± 0.0030" 0.060" (1.524mm) ± 0.0040"	½ oz (18µm) ED, 1 oz (35µm) ED	24" X 18" (610mm X 457mm) 24.25" X 18.25" (616mm X 464mm) 48" X 36" (1220mm X 914mm) 48.25" X 36.25" (1226mm X 921mm)
MAGTRES™ 555	0.040" (1.016mm) ± 0.002" 0.060" (1.524mm) ± 0.003" 0.080" (2.032mm) ± 0.004" 0.100" (2.540mm) ± 0.005" 0.140" (3.556mm) ± 0.007" 0.200" (5.080mm) ± 0.009" 0.260" (6.604mm) ± 0.009"	1 oz (35µm) ED	12" X 18" (305mm X 457mm)
XtremeSpeed™ R01200™	0.003" (0.076mm) ± 0.0005" 0.004" (0.102mm) ± 0.0005" 0.005" (0.127mm) ± 0.0007" 0.006" (0.152mm) ± 0.0007" 0.007" (0.178mm) ± 0.0010" 0.008" (0.203mm) ± 0.0010" 0.010" (0.254mm) ± 0.0010"	½ oz (18µm), 1 oz (35µm) rolled 2 oz (70µm) Reverse Treat	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm) 24" X 36" (610mm X 914mm)
R03003G2™	0.005" (0.127mm) ± 0.0005" 0.010" (0.254mm) ± 0.0007"	½ oz (18µm) ED	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm)
R03003™	0.005" (0.127mm) ± 0.0005" 0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.001" 0.030" (0.762mm) ± 0.0015" 0.060" (1.524mm) ± 0.003"	½ oz (18µm) ED, 1 oz (35µm) ED ½ oz (18µm), 1 oz (35µm) rolled	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
R03035™	0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.001" 0.060" (1.524mm) ± 0.003"	½ oz (18µm), 1 oz (35µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
R03006™ R03010™	0.005" (0.127mm) ± 0.0005" 0.010" (0.254mm) ± 0.0007" 0.025" (0.635mm) ± 0.001" 0.050" (1.270mm) ± 0.002"	½ oz (18µm) ED, 1 oz (35µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
R03210™	0.025" (0.635mm) ± 0.001" 0.050" (1.270mm) ± 0.002"	½ oz (18µm), 1 oz (35µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
R04725JXR™	0.0307" (0.78mm) ± 0.002" 0.0607" (1.54mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) LoPro reverse treated ED foil	24" X 18" (610mm X 457mm) 48" X 36" (1220mm X 914mm)
R04730G3 ED™ (With ED foil)	0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.002" 0.060" (1.524mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) ED	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)

Thickness, Tolerance & Panel Size inches (mm)

Laminates

Product	Available Dielectric Thickness (Without The Cladding)	Available Claddings	Available Panel Sizes
RO4730G3™ LoPro®	0.0057" (0.145mm) ± 0.0007" 0.0107" (0.272mm) ± 0.001" 0.0207" (0.526mm) ± 0.0015" 0.0307" (0.780mm) ± 0.002" 0.0607" (1.542mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) LoPro reverse treated ED foil	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4533™	0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.0015" 0.060" (1.524mm) ± 0.004"	½ oz (18µm) ED, 1 oz (35µm) ED	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4533 LoPro®	0.0207" (0.526mm) ± 0.0015" 0.0307" (0.780mm) ± 0.002" 0.0607" (1.542mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) LoPro reverse treated ED foil	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4003C™	0.008" (0.203mm) ± 0.001" 0.012" (0.305mm) ± 0.001" 0.016" (0.406mm) ± 0.0015" 0.020" (0.508mm) ± 0.0015" 0.032" (0.813mm) ± 0.002" 0.060" (1.524mm) ± 0.004"	½ oz (18µm) ED, 1 oz (35µm) ED ½ oz (18µm) Ticer & OhmegaPly Resistive Foil -Only Available 12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4360G2™	0.008" (0.203mm) ± 0.007" 0.016" (0.406mm) ± 0.0015" 0.020" (0.508mm) ± 0.0015" 0.024" (0.610mm) ± 0.0015" 0.032" (0.813mm) ± 0.002" 0.060" (1.524mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) ED ½ oz (18µm) Ticer Resistive Foil -Only Available 12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4003C LoPro®	0.0087" (0.220mm) ± 0.001" 0.0127" (0.323mm) ± 0.001" 0.0167" (0.424mm) ± 0.0015" 0.0207" (0.526mm) ± 0.0015" 0.0327" (0.831mm) ± 0.002" 0.0607" (1.542mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) LoPro reverse treated ED foil	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4350B™	0.0040" (0.101mm) ± 0.0007" 0.0066" (0.168mm) ± 0.0007" 0.010" (0.254mm) ± 0.001" 0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.002" 0.060" (1.524mm) ± 0.004"	½ oz (18µm) ED, 1 oz (35µm) ED ½ oz Ticer Resistive Foil -Only Available 12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4350B LoPro®	0.0040" (0.102mm) ± 0.0007" 0.0073" (0.185mm) ± 0.0007" 0.0107" (0.272mm) ± 0.001" 0.0207" (0.526mm) ± 0.0015" 0.0307" (0.780mm) ± 0.002" 0.0607" (1.542mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) LoPro reverse treated ED foil	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4835™	0.0066" (0.168mm) ± 0.0007" 0.010" (0.254mm) ± 0.001" 0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.002" 0.060" (1.524mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) ED Foil ½ oz Ticer Resistive Foil -Only Available 12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4835 LoPro®	0.0040" (0.102mm) ± 0.0007" 0.0073" (0.185mm) ± 0.0007" 0.0107" (0.272mm) ± 0.001" 0.0207" (0.526mm) ± 0.0015" 0.0307" (0.780mm) ± 0.002" 0.0607" (1.542mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) LoPro reverse treated ED foil	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4835T™	0.0025" (0.064mm) ± 0.0006" 0.0030" (0.076mm) ± 0.0006" 0.0040" (0.101mm) ± 0.0006" 0.0050" (0.127mm) ± 0.0006"	½ oz (18µm) ED, 1 oz (35 µm) ED	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RO4830™	0.0050" (0.127mm) ± 0.0006" 0.0094" (0.239mm) ± 0.0010"	½ oz (18µm), 1 oz (35µm) LoPro reverse treated ED foil	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)

Thickness, Tolerance & Panel Size inches (mm)

Laminates

Product	Available Dielectric Thickness (Without The Cladding)	Available Claddings	Available Panel Sizes
R04534 LoPro®	0.0207" (0.526mm) ± 0.0015" 0.0327" (0.831mm) ± 0.002" 0.0607" (1.542mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) LoPro reverse treated ED foil	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
R04535™	0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.002" 0.060" (1.524mm) ± 0.004"	½ oz (18µm) ED, 1 oz (35µm) ED	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
R04535 LoPro®	0.0207" (0.053mm) ± 0.0015" 0.0307" (0.780mm) ± 0.002" 0.0607" (1.542mm) ± 0.004"	½ oz (18µm), 1 oz (35µm) LoPro reverse treated ED foil	24" X 18" (610mm X 457mm) 24" X 21" (610mm X 533mm) 24" X 36" (1219mm X 914mm) 48" X 36" (1220mm X 914mm)
RT/duroid 5880LZ	0.010" (0.254mm) ± 0.0010" 0.020" (0.508mm) ± 0.0010" 0.050" (1.270mm) ± 0.0030" 0.100" (2.540mm) ± 0.0050"	½ oz (18µm) ED, 1 oz (35µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
RT/duroid® 5870 RT/duroid 5880	0.005" (0.127mm) ± 0.0005" 0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.0010" 0.031" (0.787mm) ± 0.0010" 0.062" (1.575mm) ± 0.0020"	½ (18µm), 1 oz (35µm) ED ½ (18µm), 1 oz (35µm) Rolled Copper	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
RT/duroid 6002	0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.0010" 0.030" (0.762mm) ± 0.0015" 0.060" (1.524mm) ± 0.0020"	½ (18µm), 1 oz (35µm) ED ½ (18µm), 1 oz (35µm) Rolled Copper	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)
RT/duroid 6202	0.005" (0.127mm) ± 0.0005" 0.020" (0.508mm) ± 0.0010" 0.030" (0.762mm) ± 0.0010"	½ (18µm), 1 oz (35µm) ED ½ (18µm), 1 oz (35µm) Rolled Copper	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
RT/duroid 6202PR	0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.0010"	½ (18µm), 1 oz (35µm) ED ½ (18µm), 1 oz (35µm) Rolled Copper	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
RT/duroid 6035HTC	0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.001" 0.030" (0.762mm) ± 0.0015" 0.060" (1.524mm) ± 0.003"	½ (18µm), 1 oz (35µm) ED	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
RT/duroid 6010.2LM RT/duroid 6006	0.025" (0.635mm) ± 0.0010" 0.050" (1.270mm) ± 0.0020" 0.075" (1.905mm) ± 0.0040"	½ (18µm), 1 oz (35µm) ED	10" X 10" (254mm X 254mm) 10" X 20" (254mm X 508mm) 18" X 12" (457mm X 305mm)
TC350™	0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.0020" 0.060" (1.524mm) ± 0.0030"	½ (18µm), 1 oz (35µm) ED ½ (18µm), 1 oz (35µm) RT	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
TC350 Plus	0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.0020" 0.060" (1.524mm) ± 0.0030"	½ (18µm), 1 oz (35µm) Reverse Treated	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
TC600™	0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.0010" 0.030" (0.762mm) ± 0.0020" 0.060" (1.524mm) ± 0.0030"	½ (18µm), 1 oz (35µm) ED ½ (18µm), 1 oz (35µm) Reverse Treated	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)

Thickness, Tolerance & Panel Size inches (mm)

Laminates

Product	Available Dielectric Thickness (Without The Cladding)	Available Claddings	Available Panel Sizes
TMM® 3 TMM 4 TMM 6 TMM 10 TMM 10i TMM 13i	0.015" (0.381mm) ± 0.0015" 0.025" (0.635mm) ± 0.0015" 0.030" (0.762mm) ± 0.0015" 0.050" (1.270mm) ± 0.0015" 0.060" (1.524mm) ± 0.0015" 0.075" (1.905mm) ± 0.0015" 0.100" (2.540mm) ± 0.0015" 0.125" (3.175mm) ± 0.0015" 0.150" (3.810mm) ± 0.0015" 0.200" (5.080mm) ± 0.0015" 0.250" (6.350mm) ± 0.0015" 0.500" (12.70mm) ± 0.0015" Non-standard and custom thicknesses available. Please check with Rogers' Representative to confirm availability.	½ (18µm), 1 oz (35µm) ED	18" X 12" (457mm X 305mm) 18" X 24" (457mm X 610mm)

Thickness, Tolerance & Panel Size inches (mm)

Bonding Materials

Product	Available Dielectric Thickness (Without The Cladding)	Available Claddings	Available Panel Sizes
2929 Thermoset Bondply	0.0015" (0.038mm) 0.0020" (0.051mm) 0.0030" (0.076mm)	N/A	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
92ML Prepreg Ceramic Filled Thermoset Prepreg	104 88% 0.0032" (0.081mm) 106 90% 0.0042" (0.107mm) 1080 85% 0.0060" (0.152mm)	N/A	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
COOLSPAN® TECA Thermoset Thermally & Electrically Conductive Adhesive (TECA) Film	0.0020" (0.051mm) ± 0.0005" 0.0040" (0.102mm) ± 0.0005"	N/A	10" X 12" (254mm X 305mm)
6250 Thermoplastic Bonding Film	0.0015" (0.038mm)	N/A	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
6700 Thermoplastic Bonding Film	0.0015" (0.038mm) 0.0030" (0.076mm)	N/A	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm)
R04450F™ Thermoset - Hydrocarbon / Ceramic / Woven Glass / Prepreg	0.0040" (0.102mm) ± 0.0007"	N/A	16" X 18" (406mm X 457mm) 24" X 18" (610mm X 457mm) 24" X 36" (610mm X 914mm) 24.5" X 18.5" (622mm X 470mm)
R04450T Thermoset- Hydrocarbon / Ceramic / Spread Woven Glass / Prepreg	0.0025" (0.064mm) ± 0.0007" 0.0030" (0.076mm) ± 0.0007" 0.0035" (0.089mm) ± 0.0007" 0.0040" (0.101mm) ± 0.0007" 0.0045" (0.114mm) ± 0.0007" 0.0050" (0.127mm) ± 0.0007" 0.0060" (0.152mm) ± 0.0007"	N/A	
R04460G2 Thermoset - Hydrocarbon / Ceramic / Woven Glass / Prepreg	0.0040" (0.101mm) ± 0.0007"	N/A	
XtremeSpeed™ R01200™ Bondply	0.0025" (0.064mm) 0.0030" (0.076mm) 0.0040" (0.102mm) 0.0050" (0.127mm)	N/A	12" X 18" (305mm X 457mm) 24" X 18" (610mm X 457mm) 24" X 36" (610mm X 914mm)
SpeedWave™ 300P Prepreg	0.0020" (0.051 mm) 1035 RC 67% 0.0025" (0.064 mm) 1035 RC 72%, 106 RC 76% 0.0030" (0.076 mm) 1078 RC 64%, 1035 RC 76% 0.0035" (0.089 mm) 1078 RC 69%, 1080 RC 69% 0.0040" (0.102 mm) 2113 RC 57%, 1080 RC 72% 0.0050" (0.127 mm) 2116 RC 56% 0.0055" (0.140 mm) 2116 RC 59%	N/A	24" X 18" (610mm X 457mm)

Ordering Materials From Rogers :

Rogers Corporation has global customer service locations to assist with the order process. Please see the back of the guide to determine which office in the Americas, Europe or Asia is most convenient for you.

The following represents a typical process for determining a material to purchase and placing an order:

Step 1 **Determining the Rogers Material Product Grade to Use**

Rogers provides a wide range of specialty material types (PTFE, hydrocarbon ceramic, LCP, etc.) to offer unique combinations of electrical, thermal and mechanical properties. Performance requirements usually determine which Rogers Product Grade best suits the application. For example, if requirements point to material with the lowest dissipation factor (tan d) combined with a high dielectric constant, that may lead to one of our PTFE offerings. In another example mechanical strength may be required, pointing to a thermoset product, such as RO4000® laminate.

Common examples of Rogers product grades include: RT/duroid® 5880, CLTE-XT™, RO4350B™, RO3003™, and TMM®. It is critical to pick the correct material grade when you order. Our technical experts are happy to assist you in making that determination.

Step 2 **Choosing Thickness and Thickness Tolerance**

Following IPC guidelines, laminate thickness is specified as dielectric thickness and does not include thickness of copper foil or other metal claddings. In most cases, thickness tolerance is defined by product grade and thickness. However, custom tolerances are considered upon request for certain high reliability products (RT/duroid and CLTE Series™ laminates are examples).

Special charges may apply for customers requesting non-standard thicknesses or tolerances. Please see pages 13-17 for a list of available panel sizes and thicknesses by product grade.

Step 3 **Selecting Cladding Type**

Rogers offers cladding options which include ¼, ½, 1, & 2 oz. electrodeposited copper foil; ½, 1, & 2 oz. reverse treated copper foil; and ½, 1, & 2 oz. rolled copper foil. Not all laminate systems are available with all copper foil claddings. For example, TMM and RO4000 series laminates are not supplied with ¼ oz. electrodeposited foil or rolled copper foil.

Thick metal claddings such as aluminum, copper and brass are available on Rogers RT/duroid, CLTE™, DiClad®, CuClad® and IsoClad® laminates and may be based on dielectric thickness. Thick aluminum, copper, and brass claddings are also available in a range of thicknesses and thickness tolerances. Thick aluminum and brass claddings are available on most TMM laminates. Please note, thick metal cladding is not available on RO4000 laminates.

Some material grades may be supplied unclad. Call Rogers' Customer Service Representatives to discuss options.

Step 4 **Picking your Panel Size***

Finally, you need to select the panel size dimensions you desire. For example, a very common panel size in the printed circuit board industry is 24" (610mm) x 18" (457mm).

Please note, different product grades may have different available panel sizes due to unique manufacturing processes. Special charges typically apply for non-standard panel sizes. Please see pages 13-17 for a list of available panel sizes and thicknesses by product grade.

*Various terminology is used in the industry to represent panel dimensions. Rogers' panel dimensions are always listed as: Cross machine(Y) x Machine direction(X).

Specification Requirements and Terms and Conditions of Sale

Rogers material specifications are applicable unless otherwise agreed upon prior to order. Certificates of conformance are available for purchased goods. All other requirements must be discussed at the time the order is placed. If special testing or data generation is required, additional costs may be incurred.



For Rogers Terms and Conditions of Sale, please go to:
<https://www.rogerscorp.com/en/terms-and-conditions>

About Rogers' Materials

Rogers manufactures high frequency laminates and prepregs for applications in wireless base station, aerospace and defense, automotive, high speed digital and advanced chip packaging industries. All of our products are manufactured in ISO-9001:2015 certified facilities.

IPC Slash Sheet Definitions

Product	IPC-4103B/	Product	IPC-4103B/	Product	IPC-4103B/
CLTE	006	RO3003	230	TMM3	240
CLTE-AT	006	RO3003G2	230	TMM4	250
CLTE-XT	006	RO3006	270	TMM6	270
CLTE-MW	006	RO3010	280	TMM10	280
TC350	009	RO3035	240	TMM10i	280
TC350 Plus	240	RO3210	280	TMM13i	290
TC600	007	RO4003C	240	Product	IPC-4101E/
AD250C	220	RO4350B	240	92ML Laminate	L0
AD255C	220	RO4360G2	270	92ML Prepreg	P0
AD300	009	RO4450F	540	SpeedWave 300P	102
AD350	009	RO4460G2	570		
AD1000	008	RO4450T	540		
DiClad 527	002	RO4533	240		
DiClad 870	005	RO4534	240		
DiClad 880	005	RO4535	240		
CuClad 217	005	RO4725JXR	220		
CuClad 233	005	RO4835	240		
CuClad 250	002	RO4835T	240		
IsoClad 917 (1 MHz)	003	RT/duroid 5870	210		
IsoClad 917 (10 GHz)	004	RT/duroid 5880	200		
IsoClad 933 (1 MHz)	003	RT/duroid 5880LZ	200		
IsoClad 933 (10 GHz)	004	RT/duroid 6010.2 LM	280		
RO1200	230	RT/duroid 6002	230		
RO1200 Bondply	530	RT/duroid 6202	230		
6250 Film	015	RT/duroid 6202PR	270		
6700 Film	015	TC350	240		
CLTE-P	006	TC600	270		

Rogers' high frequency laminates can be purchased by contacting a Rogers' Customer Service Representative. Refer to back cover for contact information.

Interpreting Rogers Part Descriptions:

The thickness in the example below is for 20 Mils +/- 1

5880

Product Grade

18x12

Panel Size

H1/H1

Metal Cladding

R3

Revision
Number
(When
Applicable)

0200+-001

Dielectric Thickness & Tolerance

DI

Dielectric
Thickness
(When
Applicable)

ROGERS Copper Foil Designation

Copper Weight	Rogers Clad Designation	IPC-4562A				
		Foil Grade (1.2.4)	Foil Thickness (1.2.5)	Bond Enhancement Treatment (1.2.6)	Foil Profile (1.2.7)	
1/4 oz	HQ	Standard Electrodeposited (STD-E)	Q (9 μm)	Single-sided treatment (S)	Low (L)	
	CQ				Very low (V)	
1/2 oz	5E	High Temperature Elongation Electrodeposited (HTE-E)		S	Standard (S)	
	5ED					
	5E					
	5ED			Reverse-treated (R) LoPro R	L	
	HH					
	5TC					
	SH			As Rolled Wrought HTE-E	H (1/2 oz, 18 μm)	S
	AH					
	TH					
	5R	As Rolled Wrought (AR-W)				
	5RD					
	25RFO(1)(2)-5E(D)	HTE-E		S-25 OPS Ohmega	S	
	50RFO(1)(2)-5E(D)			S-50 OPS Ohmega		
	100RFO(1)(2)-5E(D)			S-100 OPS Ohmega		
	25RFT(3)(4)-5E(D)(HH)			S-25 OPS Ticer		
50RFT(3)(4)-5E(D)(HH)	S-50 OPS Ticer					
100RFT(3)(4)-5E(D)(HH)	S-100 OPS Ticer					
1 oz	1E	HTE-E		S	S	
	1ED				L	
	1E					
	1ED					
	H1					
	1TC					
	S1			R-LoPro R		
	A1	AR-W	1 (1 oz, 35 μm)	S	V	
	T1	HTE-E				
	1R	AR-W				
	1RD					
	25RFO(1)(2)-1E(D)	HTE-E				
	50RFO(1)(2)-1E(D)		S-50 OPS Ohmega			
	100RFO(1)(2)-1E(D)		S-100 OPS Ohmega			
	25RFT(3)(4)-1E(D)(H1)		S-25 OPS Ticer			
	50RFT(3)(4)-1E(D)(H1)		S-50 OPS Ticer			
	100RFT(3)(4)-1E(D)(H1)		S-100 OPS Ticer			
2 oz	2E	HTE-E	2 (2 oz, 70 μm)	S	S	
	2ED					
	H2					
	S2					
	A2	AR-W		R	L	
	2R			S	V	
	2RD					






Electrical Characterization Capabilities



Multiple Test Methods Used:

- Clamped Stripline Resonator
- Split Post Dielectric Resonator
- Full Sheet Resonance
- Ring Resonators
- Waveguide Perturbation


Microstrip 50 ohm transmission line circuit testing, differential length method using 5 mil thick RO3003™ laminate with 1/2 oz. ED copper

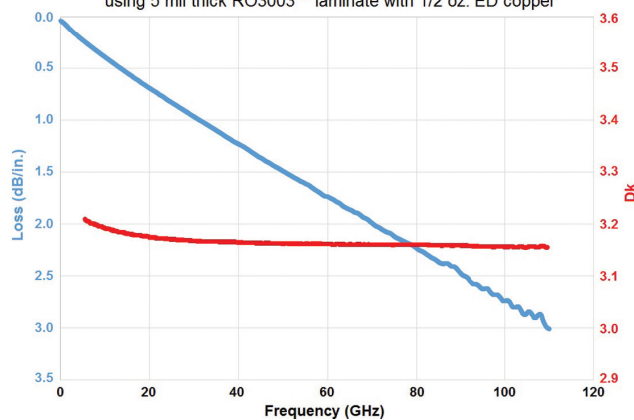

Very wideband insertion loss & phase measurements

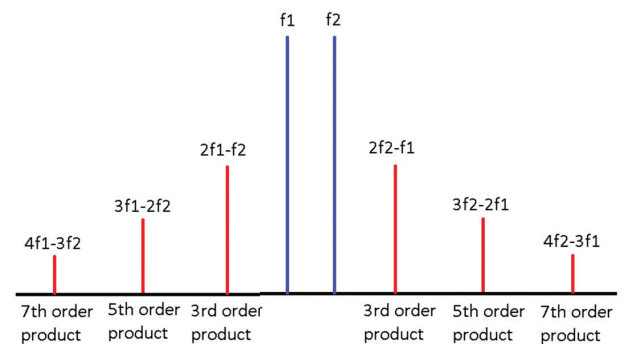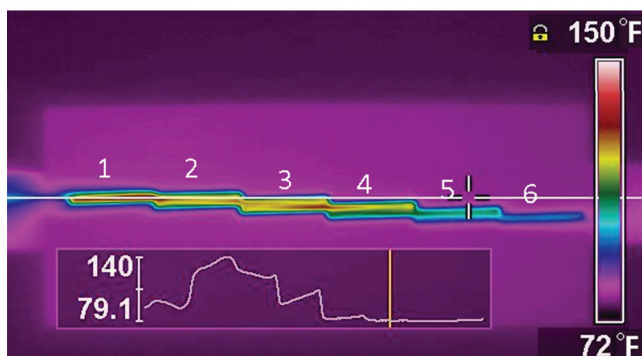

PIM Testing Capabilities

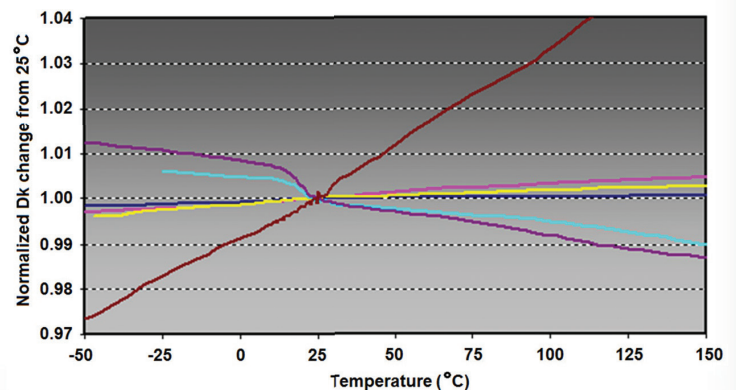

Circuit Materials:

RO3003™	RO4003™	RO4835™
PTFE / WG	Epoxy / WG	PTFE / Ceramic / WG

Primary Markets

KEY: √ = Recommended Material

Product	AUTOMOTIVE		
	Active Safety	Telematics/Infotainment	Thermal Management
2929 Bondply			
92ML™			√
AD250C™		√	
AD255C™		√	
AD300D™		√	
AD350A™		√	
CLTE-X™			
CLTE™			
CLTE-AT™			
CLTE-MW™	√		
CuClad® 217			
CuClad 233			
CuClad 250			
6250 Bonding Film			
6700 Bonding Film			
COOLSPAN®			√
DiClad® 880			
DiClad 870			
DiClad 527			
IM Series™			
IsoClad® 917			
IsoClad 933			
Kappa® 438		√	
MAGTREX™ 555			
XtremeSpeed™ R01200™			
R03003G2™	√		
R03003™	√	√	
R03035™			
R03006™			
R03010™			
R03210™			
R04730G3™			
R04533™			
R04003C™			
R04534™			
R04350B™			
R04450F™	√	√	
R04450T™	√	√	
R04460G2™			
R04835™	√	√	
R04835T™	√		
R04535™			
R04725JXR™			
R04360G2™			
R04830™	√		
RT/duroid® 5880LZ			
RT/duroid 5880			
RT/duroid 5870			
RT/duroid 6002			
RT/duroid 6202PR			
RT/duroid 6202			
RT/duroid 6006			
RT/duroid 6035HTC			
RT/duroid 6010.2LM			
TC350™			
TC350 Plus			
TC600™			
TMM® 3			
TMM 4			
TMM 6			
TMM 10			
TMM 10i			
TMM 13i			
SpeedWave™ 300P Prepreg	√	√	

KEY: √ = Recommended Material

CONNECTED DEVICES			Product
Internet of Things (IoT)	Mobile Internet Devices	Thermal Management	
			2929 Bondply
		√	92ML™
			AD250C™
			AD255C™
			AD300D™
			AD350A™
			CLTE-XT™
			CLTE™
			CLTE-AT™
			CLTE-MW™
			CuClad® 217
			CuClad 233
			CuClad 250
			6250 Bonding Film
			6700 Bonding Film
		√	COOLSPAN®
			DiClad® 880
			DiClad 870
			DiClad 527
			IM Series™
			IsoClad® 917
			IsoClad 933
√			Kappa® 438
			MAGTREX™ 555
			XtremeSpeed™ R01200™
			R03003G2™
			R03003™
			R03035™
√	√		R03006™
√	√		R03010™
			R03210™
			R04730G3™
			R04533™
√			R04003C™
			R04534™
√	√		R04350B™
			R04450F™
√			R04450T™
√			R04460G2™
√	√		R04835™
√			R04835T™
			R04535™
			R04725JXR™
√	√		R04360G2™
			R04830™
			RT/duroid® 5880LZ
			RT/duroid 5880
			RT/duroid 5870
			RT/duroid 6002
			RT/duroid 6202PR
			RT/duroid 6202
			RT/duroid 6006
			RT/duroid 6035HTC
			RT/duroid 6010.2LM
		√	TC350™
		√	TC350 Plus
		√	TC600™
			TMM® 3
			TMM 4
			TMM 6
			TMM 10
			TMM 10i
			TMM 13i
√			SpeedWave™ 300P Prepreg

Primary Markets

KEY: ✓ = Recommended Material

Product	HIGH RELIABILITY			
	Antenna Systems	Communications Systems	Radar Systems	Space Based Systems
2929 Bondply	✓	✓	✓	✓
92ML™		✓		
AD250C™	✓	✓		
AD255C™	✓	✓		
AD300D™	✓	✓		
AD350A™	✓	✓		
CLTE-XT™	✓	✓	✓	✓
CLTE™	✓	✓	✓	✓
CLTE-AT™	✓	✓	✓	✓
CLTE-MW™	✓	✓	✓	✓
CuClad® 217	✓	✓	✓	✓
CuClad 233	✓	✓	✓	✓
CuClad 250	✓	✓	✓	✓
6250 Bonding Film	✓	✓		✓
6700 Bonding Film	✓	✓		✓
COOLSPAN®			✓	
DiClad® 880				
DiClad 870				
DiClad 527				
IM Series™	✓	✓		
IsoClad® 917				
IsoClad 933				
Kappa® 438				
MAGTREX™ 555	✓	✓	✓	✓
XtremeSpeed™ R01200™				
R03003G2™				
R03003™	✓	✓	✓	
R03035™	✓	✓	✓	
R03006™	✓	✓	✓	
R03010™	✓	✓	✓	
R03210™	✓	✓	✓	✓
R04730G3™				
R04533™				
R04003C™		✓	✓	
R04534™				
R04350B™		✓	✓	
R04450F™		✓	✓	
R04450T™		✓	✓	
R04460G2™		✓	✓	
R04835™		✓	✓	
R04835T™		✓	✓	
R04535™				
R04725JXR™	✓	✓		
R04360G2™		✓	✓	
R04830™				
RT/duroid® 5880LZ	✓	✓	✓	✓
RT/duroid 5880	✓	✓	✓	✓
RT/duroid 5870	✓	✓	✓	✓
RT/duroid 6002	✓	✓	✓	✓
RT/duroid 6202PR	✓	✓	✓	✓
RT/duroid 6202	✓	✓	✓	✓
RT/duroid 6006	✓	✓	✓	✓
RT/duroid 6035HTC	✓	✓	✓	✓
RT/duroid 6010.2LM	✓	✓	✓	✓
TC350™			✓	
TC350 Plus			✓	
TC600™			✓	
TMM® 3	✓		✓	✓
TMM 4	✓		✓	✓
TMM 6	✓		✓	✓
TMM 10	✓		✓	✓
TMM 10i	✓		✓	✓
TMM 13i	✓		✓	✓
SpeedWave™ 300P Prepreg		✓	✓	

KEY: ✓ = Recommended Material

WIRED INFRASTRUCTURE			Product
Computing	IP Infrastructure	Test & Measurement	
✓	✓	✓	2929 Bondply
			92ML™
			AD250C™
			AD255C™
			AD300D™
			AD350A™
			CLTE-XT™
			CLTE™
			CLTE-AT™
			CLTE-MW™
			CuClad® 217
			CuClad 233
			CuClad 250
			6250 Bonding Film
			6700 Bonding Film
			COOLSPAN®
			DiClad® 880
			DiClad 870
			DiClad 527
			IM Series™
			IsoClad® 917
			IsoClad 933
			Kappa® 438
			MAGTREN™ 555
✓	✓	✓	XtremeSpeed™ R01200™
			R03003G2™
			R03003™
			R03035™
			R03006™
			R03010™
			R03210™
			R04730G3™
			R04533™
✓	✓	✓	R04003C™
			R04534™
✓	✓	✓	R04350B™
✓	✓	✓	R04450F™
✓	✓	✓	R04450T™
			R04460G2™
✓	✓	✓	R04835™
✓	✓	✓	R04835T™
			R04535™
			R04725JXR™
			R04360G2™
			R04830™
			RT/duroid® 5880LZ
			RT/duroid 5880
			RT/duroid 5870
			RT/duroid 6002
			RT/duroid 6202PR
			RT/duroid 6202
			RT/duroid 6006
			RT/duroid 6035HTC
			RT/duroid 6010.2LM
			TC350™
			TC350 Plus
			TC600™
			TMM® 3
			TMM 4
			TMM 6
			TMM 10
			TMM 10i
			TMM 13i
✓	✓	✓	SpeedWave™ 300P Prepreg

Primary Markets

KEY: √ = Recommended Material

Product	WIRELESS INFRASTRUCTURE			
	Antennas	Backhaul Radios	Power Amplifiers	Small Cells/DAS
2929 Bondply				
92ML™				
AD250C™	√			
AD255C™	√			
AD300D™	√			
AD350A™	√			
CLTE-XT™				
CLTE™				
CLTE-AT™		√	√	
CLTE-MW™		√	√	
CuClad® 217				
CuClad 233				
CuClad 250				
6250 Bonding Film				
6700 Bonding Film				
COOLSPAN®				
DiClad® 880				
DiClad 870				
DiClad 527				
IM Series™	√			
IsoClad® 917				
IsoClad 933				
Kappa® 438				√
MAGTREX™ 555				
XtremeSpeed™ R01200™				
R03003G2™				
R03003™		√	√	
R03035™			√	
R03006™			√	
R03010™				
R03210™				
R04730G3™	√			
R04533™	√			
R04003C™				
R04534™	√			
R04350B™		√	√	√
R04450F™			√	
R04450T™		√	√	√
R04460G2™		√	√	√
R04835™		√	√	√
R04835T™		√	√	√
R04535™				
R04725JXR™				
R04360G2™		√	√	√
R04830™				
RT/duroid® 5880LZ				
RT/duroid 5880				
RT/duroid 5870				
RT/duroid 6002				
RT/duroid 6202PR				
RT/duroid 6202				
RT/duroid 6006				
RT/duroid 6035HTC				
RT/duroid 6010.2LM				
TC350™		√		
TC350 Plus			√	
TC600™		√		
TMM® 3				
TMM 4				
TMM 6				
TMM 10				
TMM 10i				
TMM 13i				
SpeedWave™ 300P Prepreg		√	√	√

Notes

 JOIN OUR TECHNOLOGY SUPPORT HUB TODAY & ACCESS ONLINE TOOLS:

- Calculators
- Video Library
- Literature
- Material Sample Requests
- Technical Papers
- Ask an Engineer... Much More!

www.rogerscorp.com/techub



 CONTACT INFORMATION:

The Americas: Rogers Corporation
Tel: 480-961-1382

Europe/Africa: Rogers BV
Tel: 32-9-2353611

Asia: Rogers Suzhou
Tel: 86-512-6258-2872



DOWNLOAD OUR ROG MOBILE APP TO ACCESS:

Instructional Videos

- Coonrod's Corner
- Fabricator Focused Learning Series
- 5G
- Autonomous Driving
- Webinars

Technical Articles

- Extensive Database of Articles & Whitepapers

Tools

- Resonator Calculator
- Microwave Impedance Calculator
- Dk Calculator
- Conversion Calculator

ROG Mobile is available for the iPhone, iPad and Android Devices, go to the App Store to Download.



Helping **power, protect, connect** our world™

The information contained in this product selector guide is intended to assist you in designing with Rogers' circuit materials. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose. The user should determine the suitability of Rogers' circuit materials for each application.

These commodities, technology and software are exported from the United States in accordance with the Export Administration regulations. Diversion contrary to U.S. law prohibited.

ML Series, CuClad, DiClad, DiClad 880-IM, IsoClad, AD250, AD250C, AD255, AD255-IM, AD255C, AD300D, AD300D-IM, AD350A, AD1000, AD Series, CLTE, CLTE-AT, CLTE-MW, CLTE-XT, CLTE Series, COOLSPAN, Kappa, XtremeSpeed RO1200, RO3000, RO3003, RO3006, RO3010, RO3035, RO3210, RO4000, RO4003C, RO4350B, RO4360G2, RO4450F, RO4533, RO4534, RO4535, RO4730G3, RO4830, RO4835, RO4835T, RT/duroid, TC350, TC600, TC Series, TMM, the Rogers' logo and Helping power, protect, connect our world. are trademarks of Rogers Corporation or one of its subsidiaries. © 2020 All Rights Reserved. Printed in USA.
Revised 1489 100620 Publication #92-601